

# SAG

## SPRAYABLE ANTI SLIP COATING

- Make all surfaces anti-slip
- Transparent colour
- Simple, time saving application
- Removable
- Good UV resistance
- Part-time and permanent use
- Can be colored with acrylic paint



# SAFETY GRIP SPRAY

## General Information

SAFETY GRIP SPAY is a transparent coating with anti-slip-particles.  
 SAFETY GRIP SPAY is ideal for floors, steps, balustrade, handles and all other applications where surfaces have to be prepared with a safe grip. For

all out- and indoors applications and for most surfaces like cement, stone, screed, asphalt, clinker, ceramic tile, metal and so on.

SAFETY GRIP SPRAY is your product for preparing a safe and anti-slip surface.

## Technical Information


Physical state: Aerosol  
 Colour: According to product designation  
 Odor: Characteristic  
 Degree of gloss: (at measurement angle 60° acc. to DIN 67530) glossy: >15 gloss units  
 Efficiency: Depending on consistence and color of the ground: 500 ml are sufficient for 1,5 - 2,5 m<sup>2</sup>  
 Drying time (at 20°C, 50% relative air humidity):  
 Dust-dry: after approx. 10 minutes  
 Dry to touch: after approx. 30 minutes  
 Ignition temperature: 333°C  
 Lower explosion limit: 1 Vol%  
 Upper explosion limit: 13 Vol%  
 Water solubility: Immiscible

Vapour pressure (at 20°C): 2,100 hPa  
 Density (at 20°C): 0.8 g/cm<sup>3</sup>  
 Organic solvents: 88%  
 VOC-content: 660,0 g/l (88,01%)  
 Solids content: 12%  
 The drying time depends on surrounding temperature, air humidity and thickness of the applied coat.  
 Temperature resistance: to 80°C  
 UV resistance: good  
 Shelf life: 10 years if appropriate storage provided (= 10°C - 25°C, relative air humidity of max. 60%)

## Application and Use

- The surface must be clean, free of gease and dust
- Shake can carefully for 2 minutes
- Carry out spray for testing.
- The structural density and effect is depending on the number of coats and the spraying distance
- Apply several thin layers
- Can be colored with all acrylic paints (wet in wet)
- Safety Grip Spray can be removed by Supersolv, Powersolv or Megaclean

Article nr	Name	Content	Shelf Life	Catalog
T166001	Safety Grip Spray 400ml	400ml	see imprint + 120 months	SURFACE PROTECTION AND TREATMENT

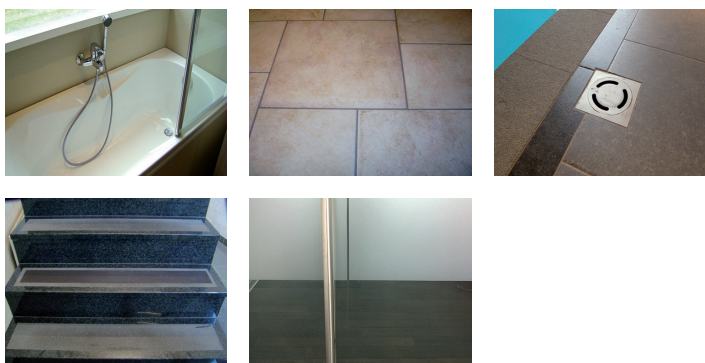

## Notice

All information including images are given with the greatest care. Still, it is appropriate to users regardless of the test the suitability of each product for their own purposes. Tech-Masters is not liable for the completeness and accuracy of information and refuses warranty for your specific use. The guarantee, which Tech-Masters products provide, relates only to the standard conditions of sale of this product. In no case Tech-Masters can be held responsible for incidental damages, or damages for improper use or sale of the product to another customer.

